


INSTALLATION AND SPECIFICATION PAGE FOR FIRE ROCK FIRE RING


Site Preparation:

- Generally, a concrete pad 4 – 6 inches thick with footings as dictated by local building codes, is the best surface on which to erect any fire feature.
- With proper ground preparation, such as the gravel and sand layering under a paver patio, a Fire Rock Fire Ring may be installed without a concrete foundation.
- If it is your intention to install this product on a combustible surface (wooden deck), take extra precautions to insulate the surface under and surrounding the Fire Ring so that neither heat transference nor sparks present a hazard.


Part a









Part b



Part c



Specifications:

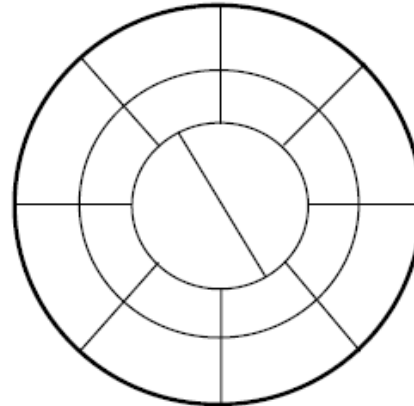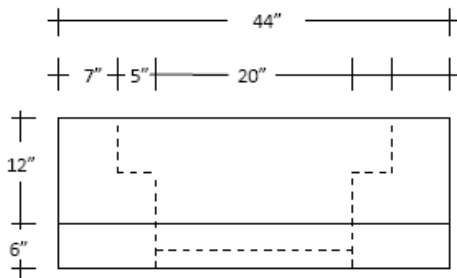

Each surface connecting with another surface must be generously covered with Fire Rock Adhesive Mortar.



Fire Rock Products, LLC

Birmingham, AL

www.firerock.us

